

## Harnessing technology to keep miners safe

NAUTITECH<sup>®</sup> is an Australian provider of smart electronic and electrical solutions for OEMs and mine sites in the underground mining industry. We design and manufacture equipment that delivers Communications and Visibility, supports Automation, and provides a platform for Asset and Condition Monitoring of underground equipment.

Our core products include Methane Monitoring and Shutdown systems, Underground Communications, Thermal and HD Cameras, IS Lights and Displays. We collaborate, test, and research to continually improve what we deliver to our customers.



Scan QR code to watch Nautitech<sup>®</sup> Cubex IS Longwall Lights



Illuminate hazardous areas underground without the need for flameproof enclosures



### Intrinsically safe LED lights

- Fully Intrinsically Safe - safe in **GROUP I, IIB** and **IIIC** hazardous environments
- First controllable IS Flood, Head, and Directional lights in Australia
- Up to 5 times brighter than standard IS lights on the market
- Independent light banks allow customised variations in beam angles, colour and intensity
- Versatile application across Longwall, Development Equipment and RTVs

05/22



### New South Wales

3/9 Packard Avenue  
Castle Hill, NSW 2154


+ 61 2 9899 6857  
+ 61 417 711 018  
sales@nautitech.com.au



### Queensland

14 John Vella Drive  
Paget, QLD 4740

+ 61 7 4911 4171  
+ 61 400 268 755  
sales@nautitech.com.au

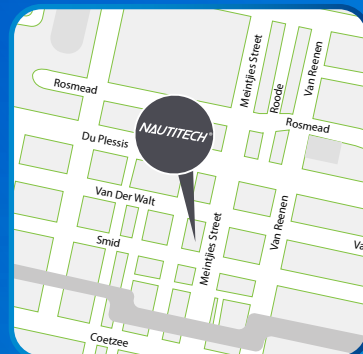

### South Africa


Middelburg, Mpumulanaga  
South Africa

+ 27 78 800 2589  
sales\_za@nautitech.com.au



# INTRINSICALLY SAFE LED LIGHTS

Typical Applications: Longwall, BSL, continuous miner, shuttle car, diesel machines, and other mobile machinery

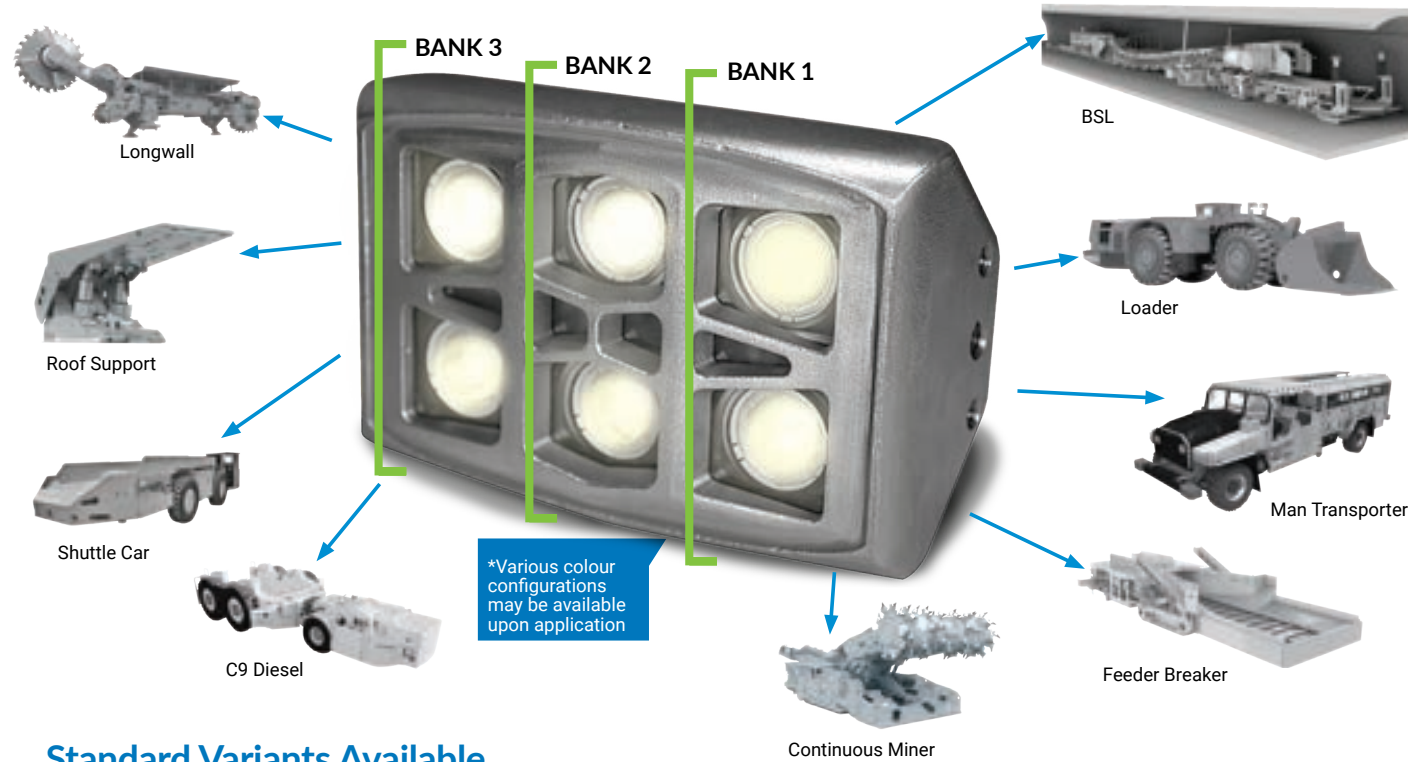


## Standard Variants Available

- ✓ Beam angle: 5° to 120°
- ✓ Colours: white, red, green, yellow or blue
- ✓ Operation: flashing, non-flashing, triggered
- ✓ Use as reverse, tail, hazard, signal, traffic, work area, spotlight and floodlight
- ✓ Preset intensity as required

A robust safety plan for GO | NO-GO Zones could include triggered lights to designate safe access or indicate hazardous situations while machinery is in operation

## Standard Configuration (Shuttle Car)

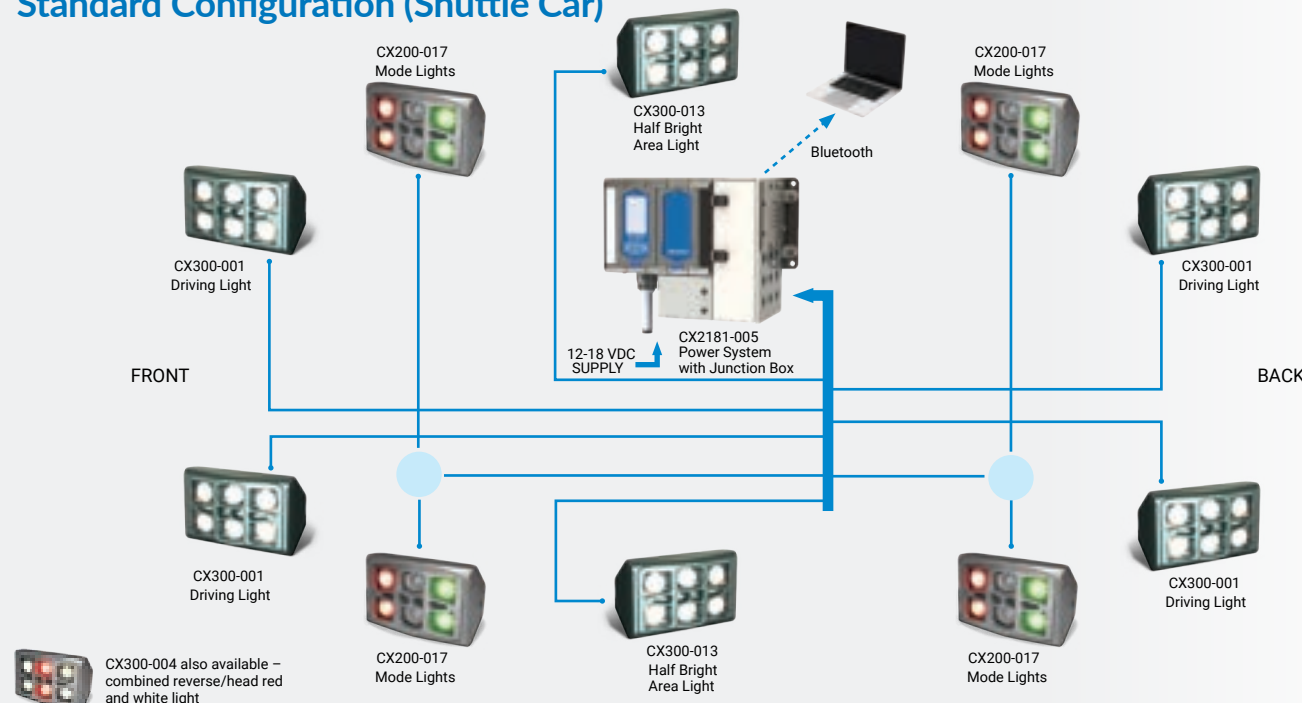

# SHUTTLE ILLUMINATION STUDY


This table illustrates the recorded illumination results at 1.5x stopping distance for a shuttle car travelling at 10km/hr

	STOPPING DISTANCE (m)	1.5X STOPPING DISTANCE (m)	MEASURED LUX INBYE @ 2.1m	MEASURED LUX OUTBYE @ 2.1m
CUBEx IS LED (CX200)	1.4	2.1	64	87
Other FLP Light	1.4	1.4	12	20

\* test conducted with only 4 LED lights

## Graphical illustration below of variance between Illumination (Shuttle Car with CUBEx IS Lights) - Illumination (Shuttle Car with FLP Lights)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
A	3.8	4.25	4.14	5.15	5.94	5.14	3.81	2.18	0.85	1.84	4.57	1.47	-0.06	4.17	49.7	137.1	17.56	2.33	6.12	3.64	0.63	5.28	4.22	5.9	6	5.27	4.72	3.58	2.54	2
B	2.79	4.74	6.39	6.75	7.3	7.45	12	11.7	5	1.74	14.52	0.85	-0.83	-4.01	-1.05	833.6	5.84	0.03	23.47	0.84	21.1	27.29	23.18	13.2	7.36	6.58	4.57	2.57	0.97	1.15
C	3.93	1.45	7.18	7.52	11.57	14.55	10.85	19.3	20.5	214.1											171.3	55.75	29.02	18.85	8.36	4.63	2.72	1.57	1.16	1.03
D	4.5	5.35	6.17	7.29	10.65	11.87	19.07	35.8	70.9	126.4											16	55.94	19.22	8.05	3.41	2.72	1.99	1.71	1.88	1.32
E	4.84	5.7	7.64	10.02	15.37	20.32	26.42	49.1	81.6	343.6				DRIVERS CAB							258.9	54	9.42	7.12	6.55	6	7.5	3.76	2.84	2.27
F	4.3	5	6.42	6.82	8.99	14.16	24.67	34.02	34.4	16.2	-0.6	0.48	4.8	-1.7	-15.5	943.8	13.96	0.2	46.67	-0.2	5.87	8.2	12.18	3.59	1.3	1.29	2.3	2.96	3.65	2.34
G	4.49	5.25	7.9	9.12	12.83	11.82	10.44	7.65	3.2	2.3	4.06	7.45	2.35	1.4	19.32	89.1	31.9	4.78	8.03	3.44	1.2	1.25	2.32	2.69	3.61	1.61	1.31	0.68	1.22	1.4

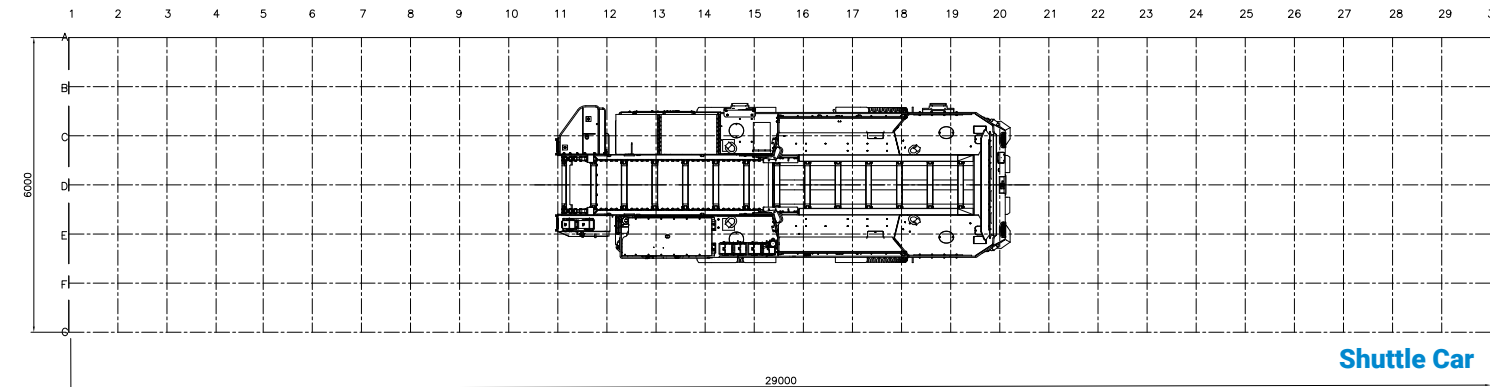

# SPECIFICATIONS

## I.S. LIGHTS

I.S. Parameters	
Ui	20V
Ii	3.2 (CX300 only)
Li	Negligible
Ci	Negligible

- 3 x Independent circuits
- High efficiency, long life
- 1500 lumens (max)
- Colour temperature 2700K-5000K
- IP 67 connector
- Rated from 10.5-20V DC
- -20°C ≤ Ta ≤ +60°C
- Suitable for 12V applications
- Tailor made cables

## POWER SUPPLY MODULE (PSM)

Entity Parameters	
Um	90V

- Ex mb [ia] | Mb (Um Applied)
- Ex ia I Ma (Um Withdrawn)
- -20°C < Ta < +60°C
- Rated voltage: 7-18V

## LIGHT INTERFACE MODULE (LIM)

Output Parameters	
Uo	20V
Io	1.2 A
Co	2uF
Lo	100uH

- 8 x GPIO ports with dual switches EX ib | Mb
- 1 port with single switch Ex ib | Mb
- Backplane power
- -20°C < Ta < +60°C
- Configuration via Bluetooth
- Crocodile scale enclosure
- IP66